




Attach plastic feet to all 4 uprights

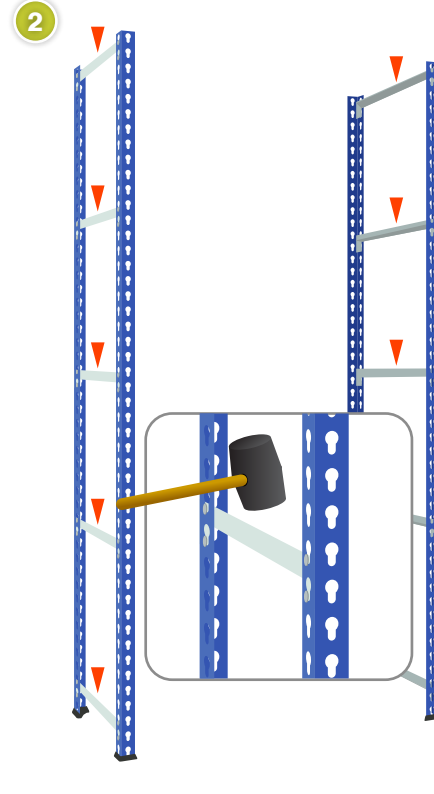

Attach side beams to the uprights at desired heights and secure with a rubber mallet.

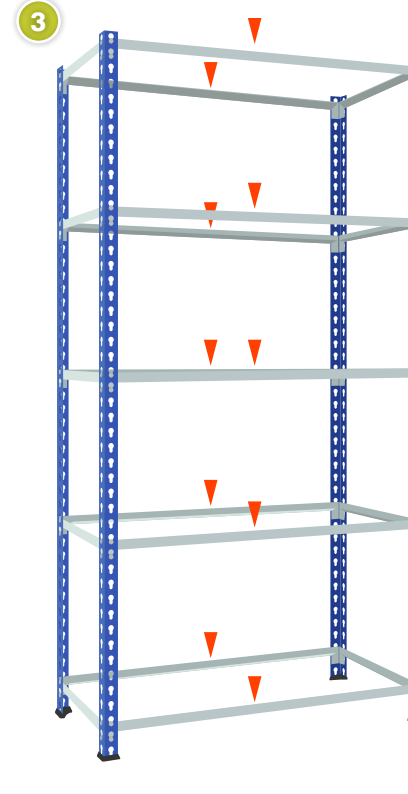

Attach front and back beams to the frames at the same level as the side beams and secure with a rubber mallet.

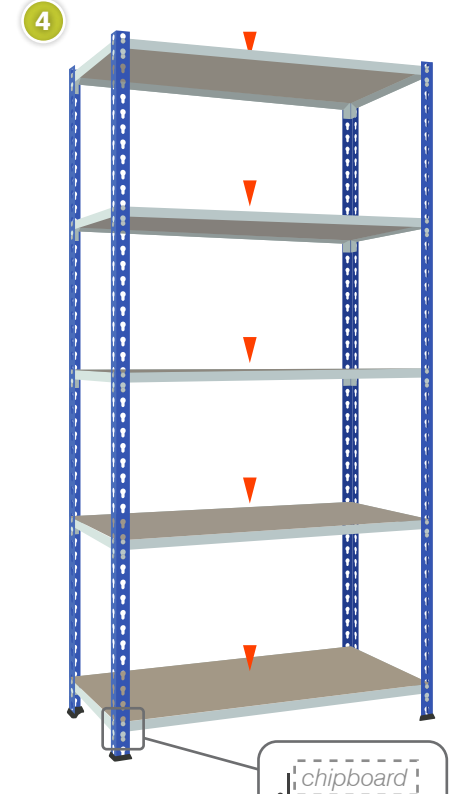

Place chipboard into the levels.

J RIVET Loads and Capacities

Shelf Pitch	Bay Load	Shelf Width	Load
305mm	2500kgs	915mm	150kgs
457mm	2400kgs	1220mm	120kgs
610mm	2300kgs		
762mm	2200kgs		
915mm	2040kgs		
1066mm	1880kgs		
1220mm	1800kgs		

*Shelf Pitch - distance between shelf levels

*Bay Load - based on 5 levels with the 1st level at the base

Tools Required

Rubber Mallet

Safety Precaution

Two competent people wearing safety gloves, safety shoes and protective eyewear are recommended to undertake the assembly.



scan for more info